


土工网的缝合与搭接

作为标准实践，土工网和复合土工网应被缝合在一起以防止材料在安装与覆盖过程中移位。这也使排水系统能保持通畅，及时排出液体和气体。操作时，可以遵循制造商指导手册。

制造商要求在复合土工网接缝时，每一部分都应与其对应部分搭接缝合好。在机器加工方向（纵向）上要求有75mm-125mm的搭接，而在横向上要求150mm-300mm的搭接。横缝应顺坡搭接。然后应使用塑料绳带把材料拴紧在一起，在机器加工方向（纵向）上连接间距为1500mm，在横向上连接间距为300mm，在锚固沟中的连接间距为150mm。如果产品是复合土工网，附着于土工网上的土工布应被平整搭接、缝纫或热粘合。下图是土工网板块连接的详细图：

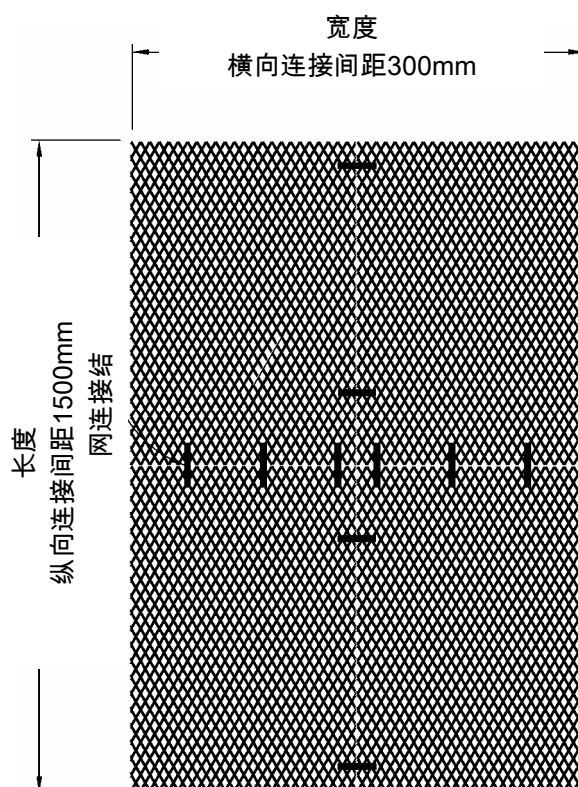

TN024CN R07/26/05

This information is provided for reference purposes only and is not intended as a warranty or guarantee. GSE assumes no liability in connection with the use of this information. Please check with GSE for current, standard minimum quality assurance procedures and specifications.

GSE and other marks used in this document are trademarks and service marks of GSE Lining Technology, Inc; certain of which are registered in the U.S.A. and other countries.

Americas	GSE Lining Technology, Inc.	Houston, Texas	800-435-2008	281-443-8564	Fax: 281-230-8650
Asia/Pacific	GSE Lining Technology Company Ltd.	Bangkok, Thailand		66-2-937-0091	Fax: 66-2-937-0097
Europe/Middle East/Africa	GSE Lining Technology GmbH	Hamburg, Germany		49-40-767420	Fax: 49-40-7674233